




HUB bearing identification

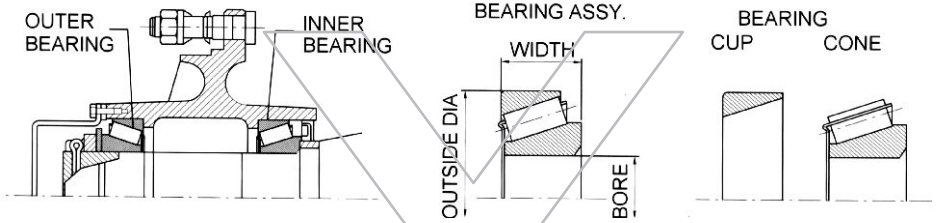

DIMENSIONS

BORE	OUTSIDE DIA.	WIDTH
40	90	35.25
45	85	20.75
55	120	45.5
60	110	29.75
65	120	32.75
65	120	39
70	125	33.25
73.025	127	36.512
85.026	150.089	44.45
88.9	152.4	39.668
89.974	146.975	40
107.95	190.5	47.625

MAKE	NO	DIA.	PCD	Mounted Brake Drum	MAKE	NO	DIA.	PCD	Mounted Brake Drum	
Proper	11000	10	22	335	Inboard	Swift	8	22	275	Inboard
Proper	11000	10	22	335	Inboard	Swift	8	22	275	Inboard
Proper	11000	8	22	275	Inboard	Swift	8	22	275	Inboard
Proper	15000	10	22	335	Inboard	Swift	10	7/8"	335	Inboard
Proper	15000	10	30	335	Inboard	Swift	10	22	335	Inboard
Proper	11000	10	22	335	Outboard	Swift	10	22	335	Outboard
Proper	11000	10	22	335	Outboard	Swift/HFT	10	22	335	Outboard
Proper	11000	10	22	335	Outboard	HFT 10S	10	7/8"	335	Inboard
Proper	15000	10	22	335	Outboard	HFT 10S	10	7/8"	225	Inboard
Proper	15000	10	30	335	Outboard	HFT 10MT	10	7/8"	335	Inboard
Proper	11000	8	22	275	Inboard	HFT 8S	8	7/8"	375	Inboard
Swift		8	22	275	Inboard	HFT 10MT	8	7/8"	375	Inboard

HUB / DRUM IDENTIFICATIONS

HUB / WHEEL TRACK MEASUREMENT

